

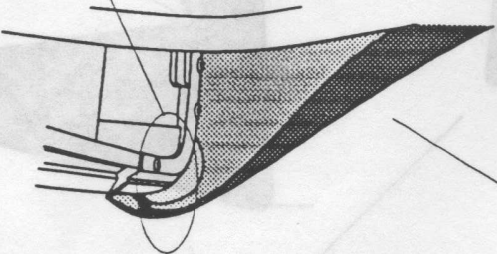
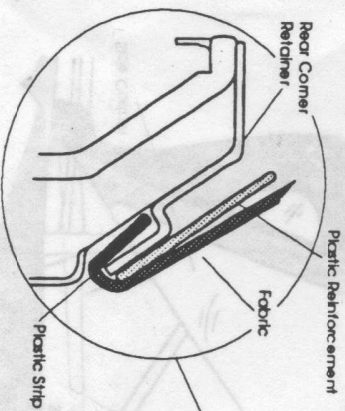


### Step Eleven

Insert rear corners of top into rear corner retainer. There is a plastic reinforcement sewn into the corner of the top. In addition to the plastic strip. Make sure that the reinforcement is not caught under the Corner Belt Roll.

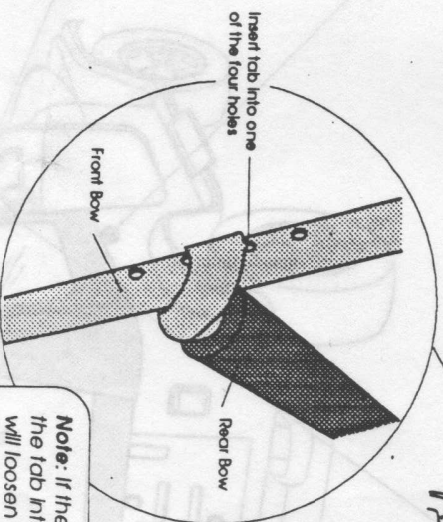

**Step Twelve**  
Slide the Rear Bow up on the Front Bow and insert the small bent tab into one of the four holes in the Front Bow.

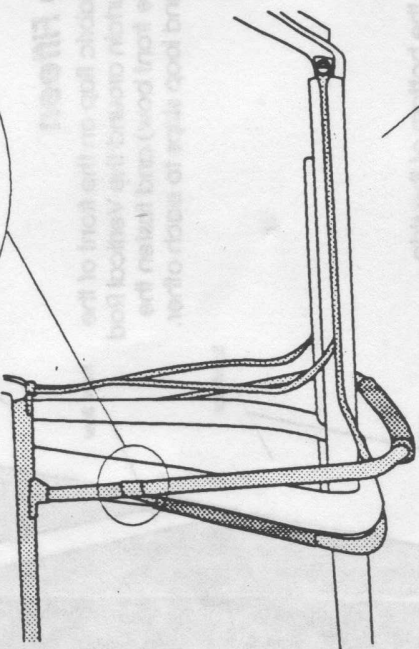

**Note:** If the top is extremely tight, slip the tab into the bottom hole. The top will loosen up after a few hours in the sun. Then the tab may be inserted into a higher hole position.