


Tailgate Retainer Detail
Cross Section



Step Five

Install the Tailgate Belt Roll flush with the top of the bevel on the tailgate. Use the Belt Roll as a template to mark, center punch and drill a 1/8" hole on each end of the Belt Roll. Install the Belt Roll with two #8 x 1/2" Pan Head Washer Screws. Then drill two 7/32" holes at the locations in the middle of the Tailgate Retainer and secure the retainer with two #10-24 Truss Head Machine Screws and two #10-24 Locknuts.

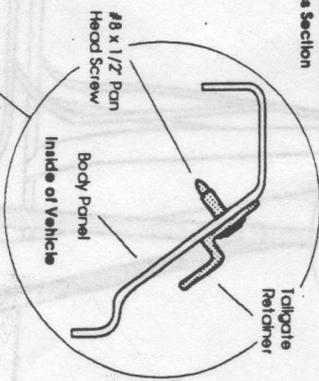